

PC35H38 V0

Product Specification

Approval

PC35H38 V0

Product Specification

RoHS

Product	White SMD LED
Part Number	PC35H38 V0
Issue Date	2021/07/10



Feature

- ✓ White SMD LED (L x W x H) of 3.5x 2.8 x 0.7 mm
- ✓ ASNI Ellipse binning
- ✓ Dice Technology : InGaN
- ✓ Qualified according to JEDEC moisture sensitivity Level 3
- ✓ Environmental friendly ; RoHS compliance
- ✓ Packing : 4000 pcs/reel


Applications

- ✓ Portable flashlight
- ✓ Reading lights
- ✓ Security / garden lighting
- ✓ General lighting
- ✓ Indoor and outdoor commercial lighting

Outline

PC35H38 V0

Product Specification

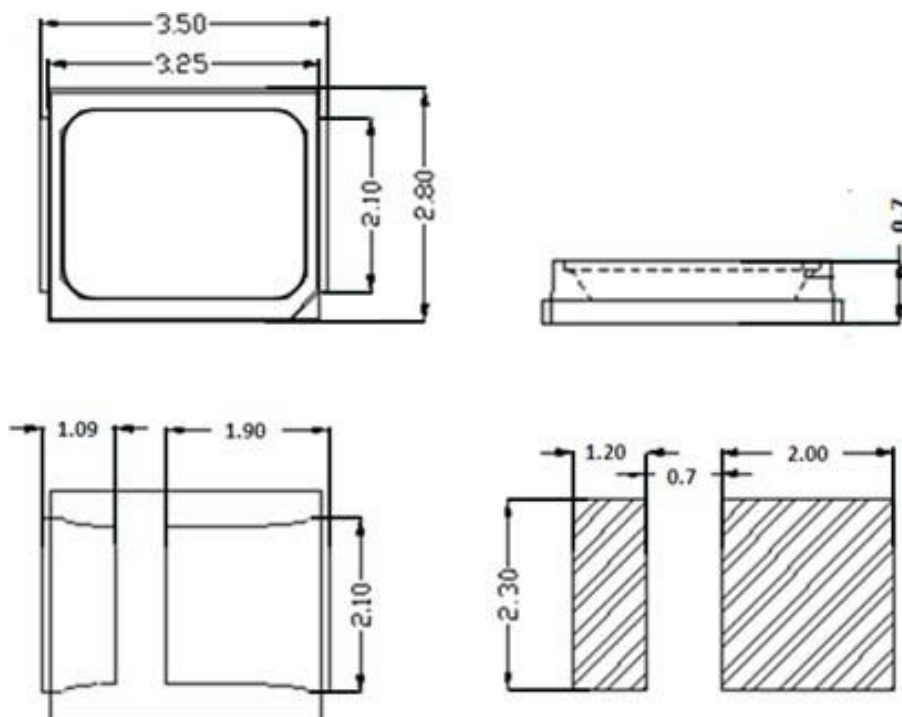

1. Unit :mm

2. Tolerance : ± 0.1 mm

Performance

PC35H38 V0
Product Specification

■ Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage ⁽¹⁾	V _F	I _F = 50 mA	16	–	20	V
Color Rendering Index ⁽²⁾	R _a		80	–	–	–
View Angle	θ		–	120	–	deg
Thermal Resistance ⁽³⁾	R _{th}		–	25	–	°C/W

(1) The Forward Voltage tolerance is ±0.1V

(2) The Color Rendering Index tolerance is ±2

(3) Thermal resistance is calculated from junction to solder

■ Luminous Flux (Ta=25°C)

CCT	Condition	Rank
2600K~3700K	I _F = 50 mA	VV,VW,VX
3700K~7000K		VW,VX,VY

* The luminous flux tolerance is ± 7%

■ Absolute Maximum Ratings

Parameter	Symbol	value	Unit
DC Forward Current ⁽¹⁾	I _F	60	mA
Power Dissipation	P _D	0.9	W
Pulse Forward Current ⁽²⁾	I _{FP}	90	mA
Storage Temperature	T _{stg}	–40 ~ 100	°C
Operating Temperature	T _{opr}	–40 ~ 85	°C
Junction Temperature	T _J	125	°C
Assembly Temperature		260 (5sec)	°C

(1) Proper current rating must be observed to maintain junction temperature below maximum at all time

(2) IFP Condition: Duty 1 / 10, Pulse within 10msec

P C 3 5 H 3 8 0 - A 2 7 1 Y 0 V V V X T W - 0 0 0

1	2	3	4	5	6	7	8		9	10	11	12	13	14	15	16	17	18	19	20		21	22	23
---	---	---	---	---	---	---	---	--	---	----	----	----	----	----	----	----	----	----	----	----	--	----	----	----

Item		Pos.	Code	Spec
Model Name		1 –8	PC35H380	PC35H38 V0
CIE		9	A	ANSI 1931 on B.B.L
Center Point				
CCT		10,11	27	27 = 2700K
			30	30 = 3000K
			35	35 = 3500K
			40	40 = 4000K
			50	50 = 5000K
			57	57 = 5700K
			65	65 = 6500K
R9		12	1	R9 > 0
CIE		13,14	X0	27A
Bin Group ⁽¹⁾			Y0	27A,27B,27C,27D,27E
IV		15,16,	VVVX	Bin code : VV VW VX
Bin Group		17,18		
Vf		19,20	TW	Bin code :T U V W
Bin Group				
Kittin	CIE ⁽¹⁾	21	0	No requirements.
g	IV	22	0	No requirements.
Rules	Vf	23	0	No requirements.

- (1) The first two digits 27 means CCT in 2700K, can be replaced to 30, 35, 40, 50, 57, 65 for different CCT requirements.
- (2) Only under an agreement between customer and Lextar Electronics, kitting rules besides “0” can be supplied.

■ Standard Ordering Code:


CCT	Ordering Code ⁽¹⁾	CIE Bin Group	IV Bin Group	Vf Bin Group
2700K	PC35H380-A271X0VVVXTW-000	X0	VV VW VX	T,U,V,W
	PC35H380-A271Y0VVVXTW-000	Y0		
3000K	PC35H380-A301X0VVVXTW-000	X0	VV VW VX	T,U,V,W
	PC35H380-A301Y0VVVXTW-000	Y0		
3500K	PC35H380-A351X0VVVXTW-000	X0	VV VW VX	T,U,V,W
	PC35H380-A351Y0VVVXTW-000	Y0		
4000K	PC35H380-A401X0VWVYTW-000	X0	VW VX VY	T,U,V,W
	PC35H380-A401Y0VWVYTW-000	Y0		
5000K	PC35H380-A501X0VWVYTW-000	X0	VW VX VY	T,U,V,W
	PC35H380-A501Y0VWVYTW-000	Y0		
5700K	PC35H380-A571X0VWVYTW-000	X0	VW VX VY	T,U,V,W
	PC35H380-A571Y0VWVYTW-000	Y0		
6500K	PC35H380-A651X0VWVYTW-000	X0	VW VX VY	T,U,V,W
	PC35H380-A651Y0VWVYTW-000	Y0		

(1) Only under an agreement between customer and Lextar Electronics, Ordering codes not in “Standard Ordering Code Definitions” can be supplied.

Binning – ANSI Ellipse


PC35H38 V0
Product Specification

Chromaticity Coordinates

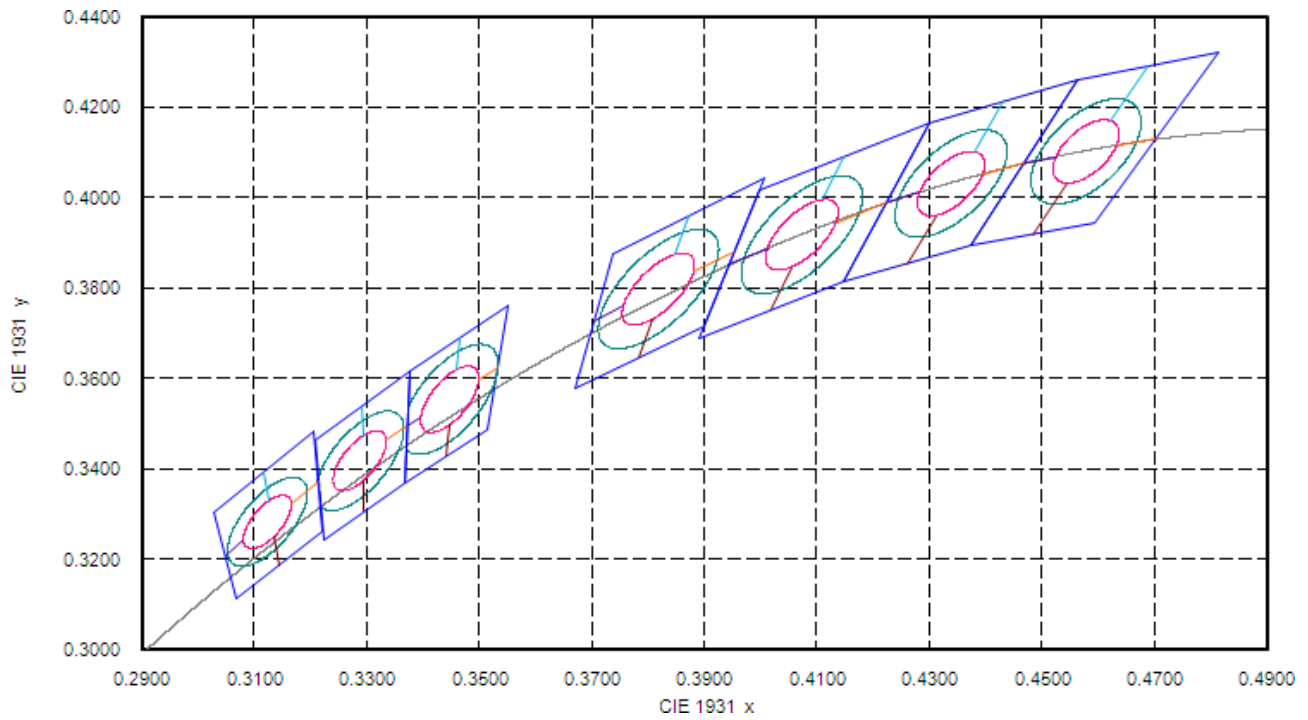

■ Bin code definition


2700K

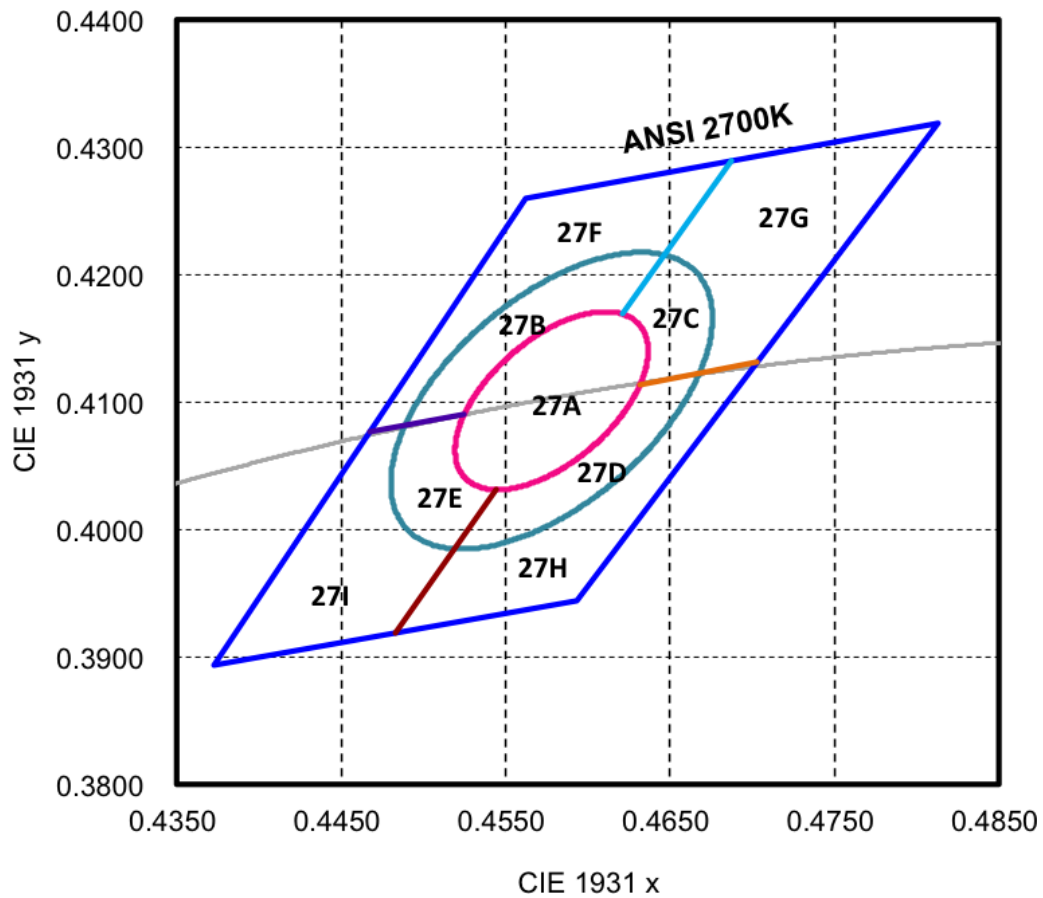

Nominal ANSI CCT	Color Space	Target Center Point (cx, cy)	Major Axis, a	Minor Axis, b	Ellipse Rotation Angle
2700K	Single 3-step MacAdam ellipse	(0.4578, 0.4101)	0.00810	0.00420	53.70°
2700K	Single 5-step MacAdam ellipse	(0.4578, 0.4101)	0.01350	0.00700	53.70°

	CIE-X	CIE-Y
2700K	0.4813	0.4319
	0.4562	0.4260
	0.4373	0.3893
	0.4593	0.3944


3000K

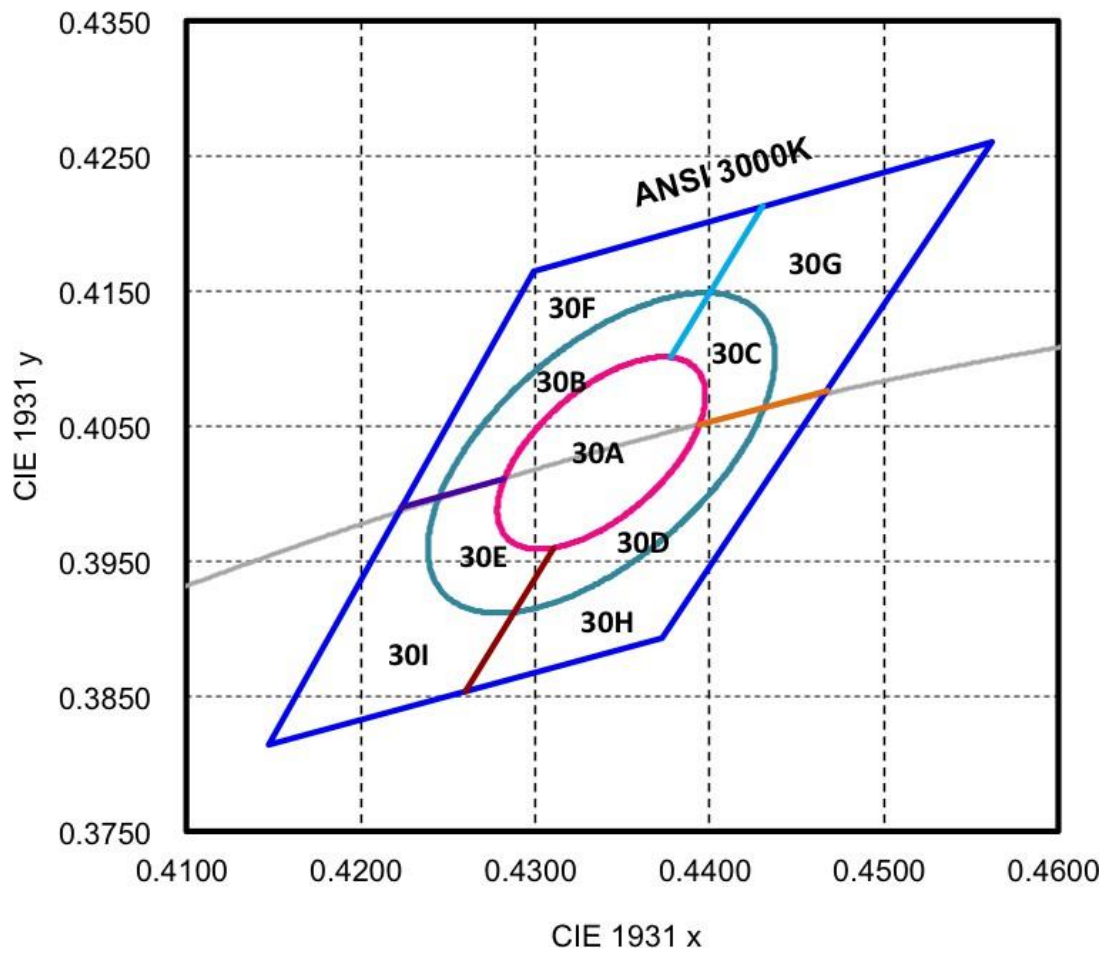

Nominal ANSI CCT	Color Space	Target Center Point (cx, cy)	Major Axis, a	Minor Axis, b	Ellipse Rotation Angle
3000K	Single 3-step MacAdam ellipse	(0.4338, 0.403)	0.00834	0.00408	53.22°
3000K	Single 5-step MacAdam ellipse	(0.4338, 0.403)	0.01390	0.00680	53.22°

	CIE-X	CIE-Y
3000K	0.4562	0.426
	0.4299	0.4165
	0.4147	0.3814
	0.4373	0.3893


3500K

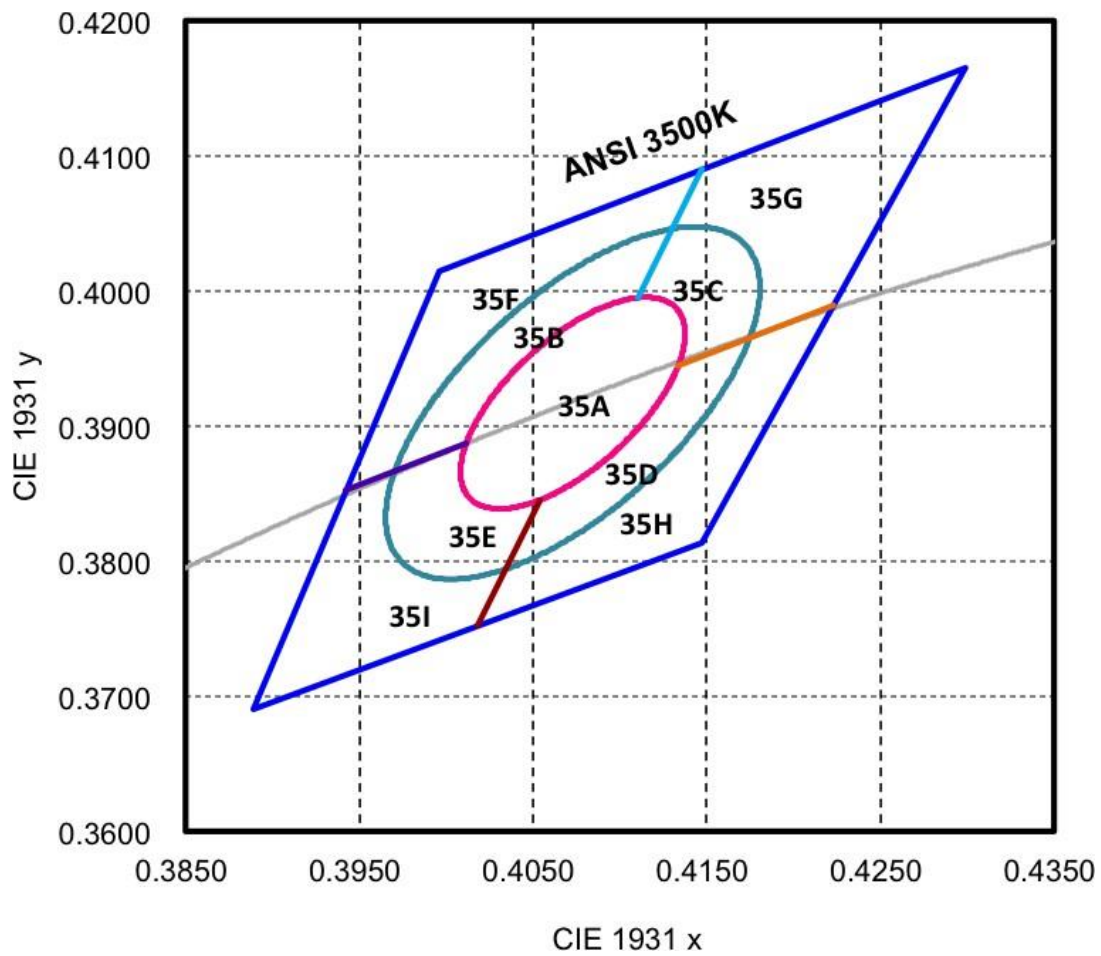

Nominal ANSI CCT	Color Space	Target Center Point (cx, cy)	Major Axis, a	Minor Axis, b	Ellipse Rotation Angle
3500K	Single 3-step MacAdam ellipse	(0.4073, 0.3917)	0.00927	0.00414	53.22°
3500K	Single 5-step MacAdam ellipse	(0.4073, 0.3917)	0.01545	0.00690	53.22°

	CIE-X	CIE-Y
3500K	0.4299	0.4165
	0.3996	0.4015
	0.3889	0.3690
	0.4147	0.3814


4000K

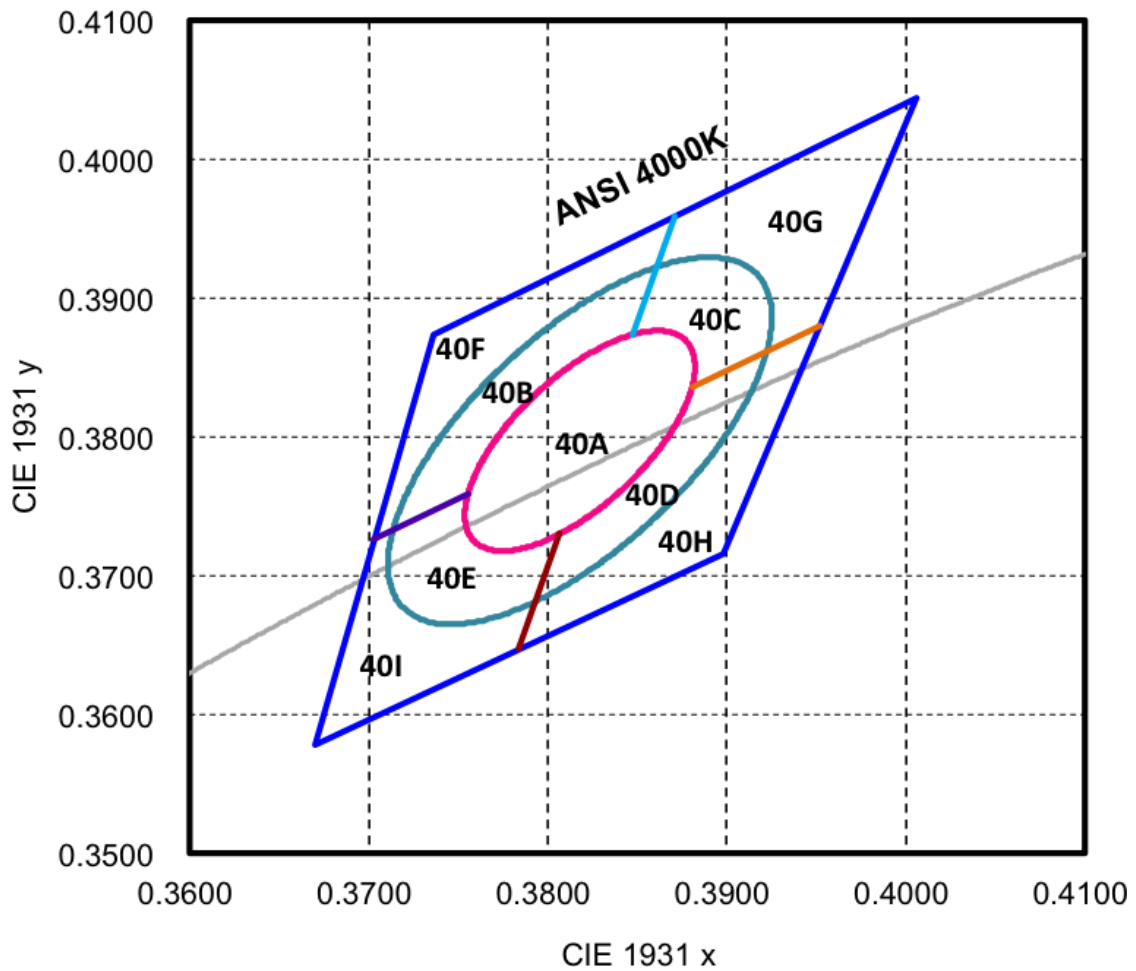

Nominal ANSI CCT	Color Space	Target Center Point (cx, cy)	Major Axis, a	Minor Axis, b	Ellipse Rotation Angle
4000K	Single 3-step MacAdam ellipse	(0.3818, 0.3797)	0.00939	0.00402	53.72°
4000K	Single 5-step MacAdam ellipse	(0.3818, 0.3797)	0.01565	0.00670	53.72°

	CIE-X	CIE-Y
4000K	0.4006	0.4044
	0.3736	0.3874
	0.3670	0.3578
	0.3898	0.3716


5000K

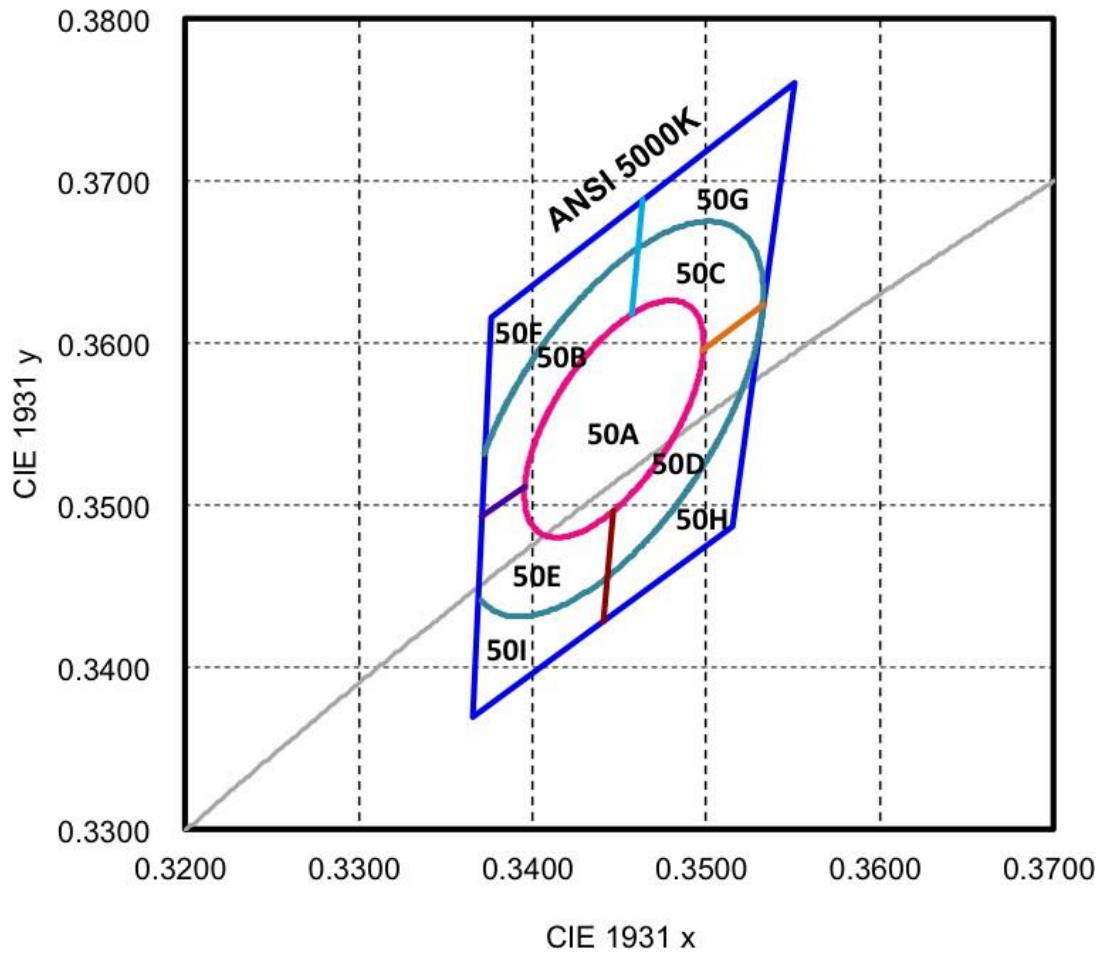

Nominal ANSI CCT	Color Space	Target Center Point (cx, cy)	Major Axis, a	Minor Axis, b	Ellipse Rotation Angle
5000K	Single 3-step MacAdam ellipse	(0.3447, 0.3553)	0.00822	0.00354	59.62°
5000K	Single 5-step MacAdam ellipse	(0.3447, 0.3553)	0.01370	0.00590	59.62°

	CIE-X	CIE-Y
5000K	0.3551	0.3760
	0.3376	0.3616
	0.3366	0.3369
	0.3515	0.3487


5700K

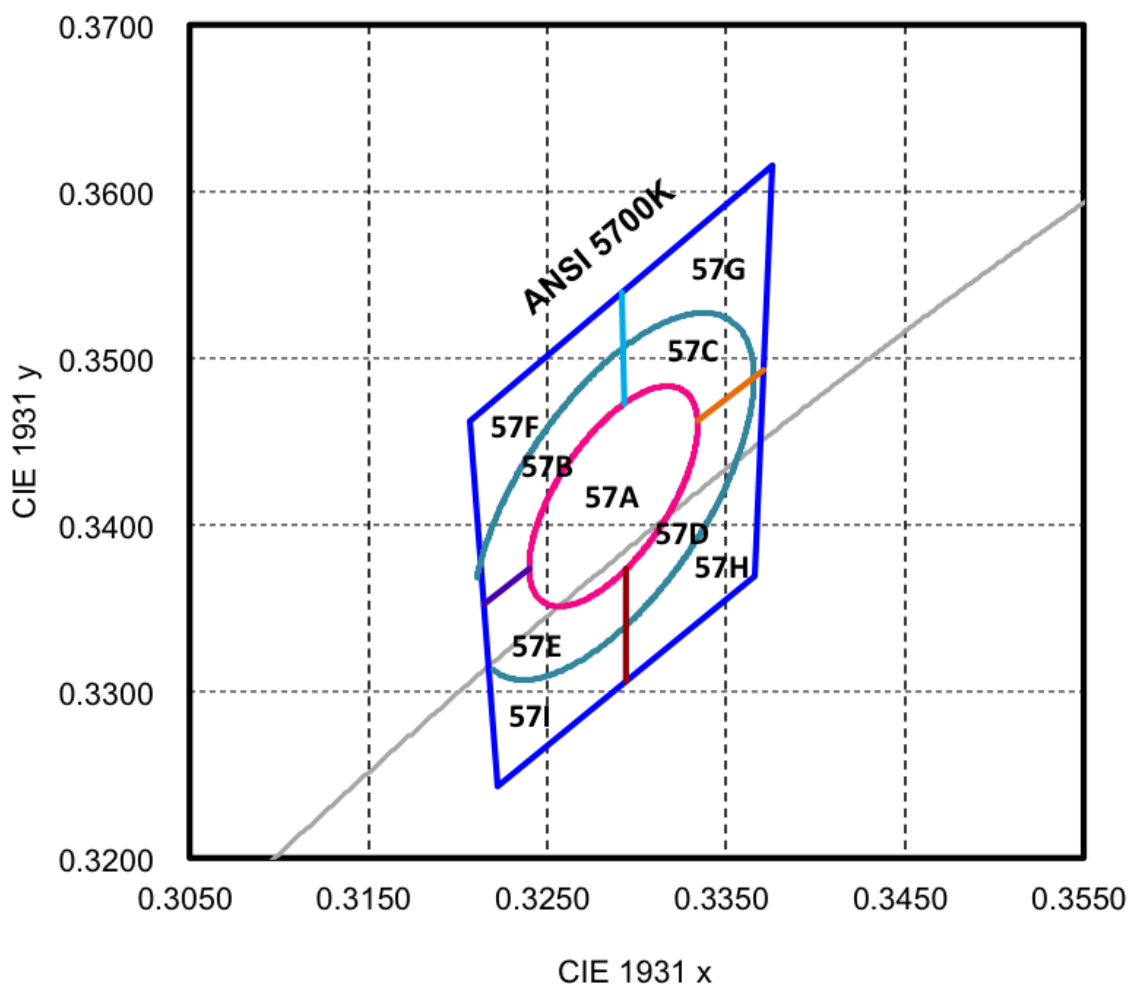

Nominal ANSI CCT	Color Space	Target Center Point (cx, cy)	Major Axis, a	Minor Axis, b	Ellipse Rotation Angle
5700K	Single 3-step MacAdam ellipse	(0.3287, 0.3417)	0.00746	0.00320	59.09°
5700K	Single 5-step MacAdam ellipse	(0.3287, 0.3417)	0.01243	0.00533	59.09°

	CIE-X	CIE-Y
5700K	0.3376	0.3616
	0.3207	0.3462
	0.3222	0.3243
	0.3366	0.3369

6500K

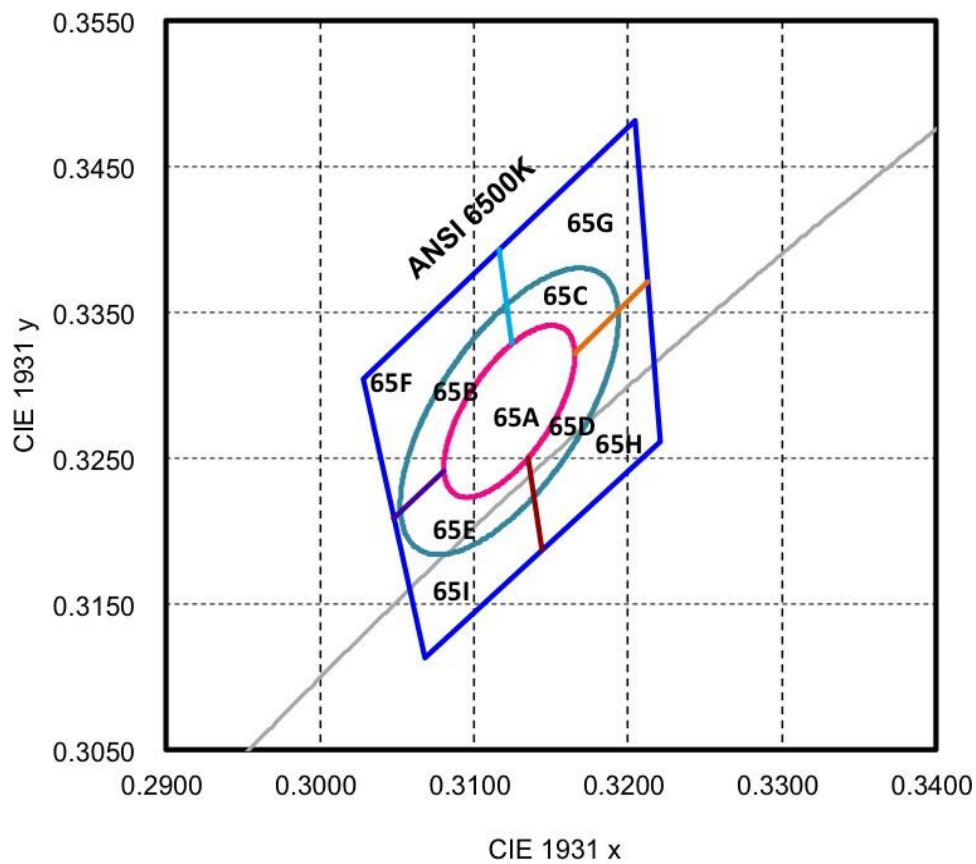

Nominal ANSI CCT	Color Space	Target Center Point (cx, cy)	Major Axis, a	Minor Axis, b	Ellipse Rotation Angle
6500K	Single 3-step MacAdam ellipse	(0.3123, 0.3282)	0.00669	0.00285	58.57°
6500K	Single 5-step MacAdam ellipse	(0.3123, 0.3282)	0.01115	0.00475	58.57°

	CIE-X	CIE-Y
6500K	0.3205	0.3481
	0.3028	0.3304
	0.3068	0.3113
	0.3221	0.3261

Note:

- (1) Correlated color temperature is derived from the CIE 1931 chromaticity diagram
- (2) CIE measurement tolerance is ± 0.005

■ Bin code definition

V _F Rank	Luminous Flux Rank	CIE Rank
G	VT	655

V _F Rank	Condition	Min.	Max.
T	I _F = 50 mA	16	17
U		17	18
V		18	19
W		19	20
Luminous Flux Rank	Condition	Min.	Max.
VR	I _F = 50 mA	95	100
VS		100	105
VT		105	110
UA		110	115
UB		115	120
VV		120	130
VW		130	140
VX		140	150
VY		150	160

Note:


- (1) The luminous flux tolerance is $\pm 7\%$
- (2) The Forward Voltage tolerance is $\pm 0.1V$

Characteristic


PC35H38 V0

Product Specification


Spectrum

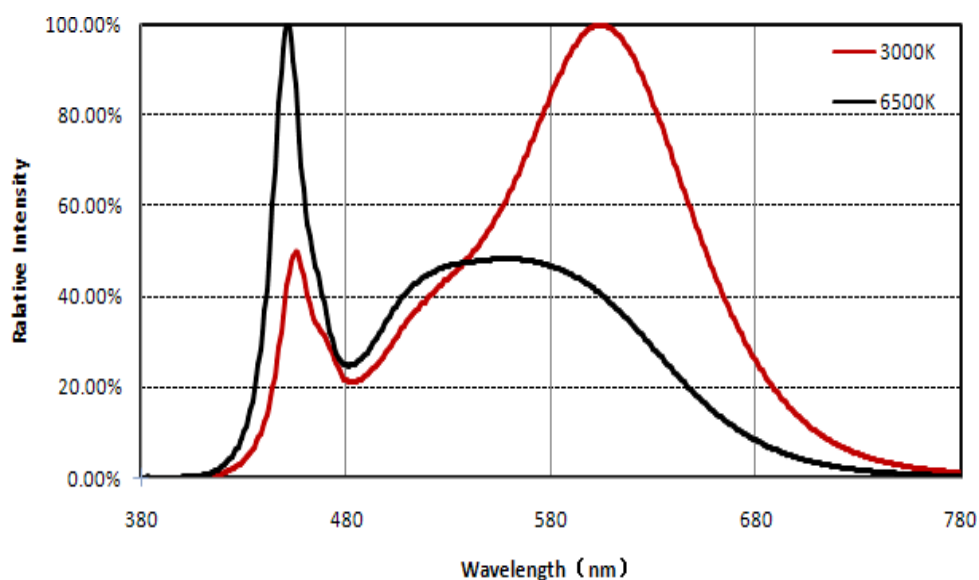


Radiation Pattern

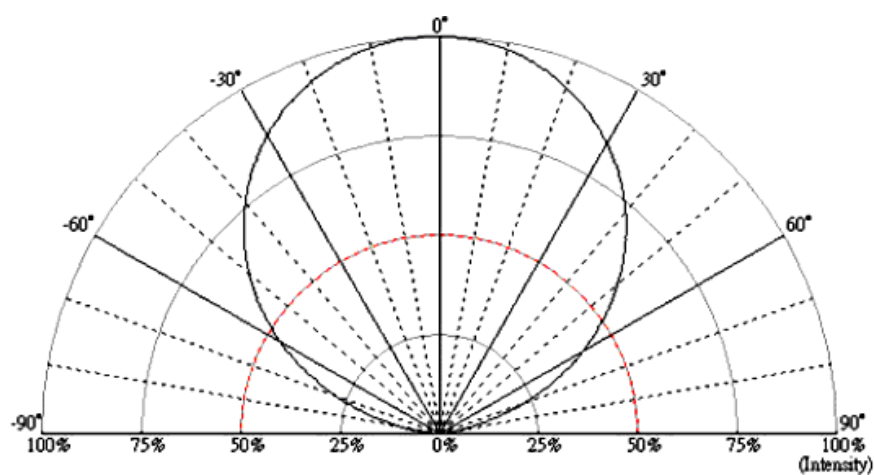



■ Forward Voltage vs. Forward Current

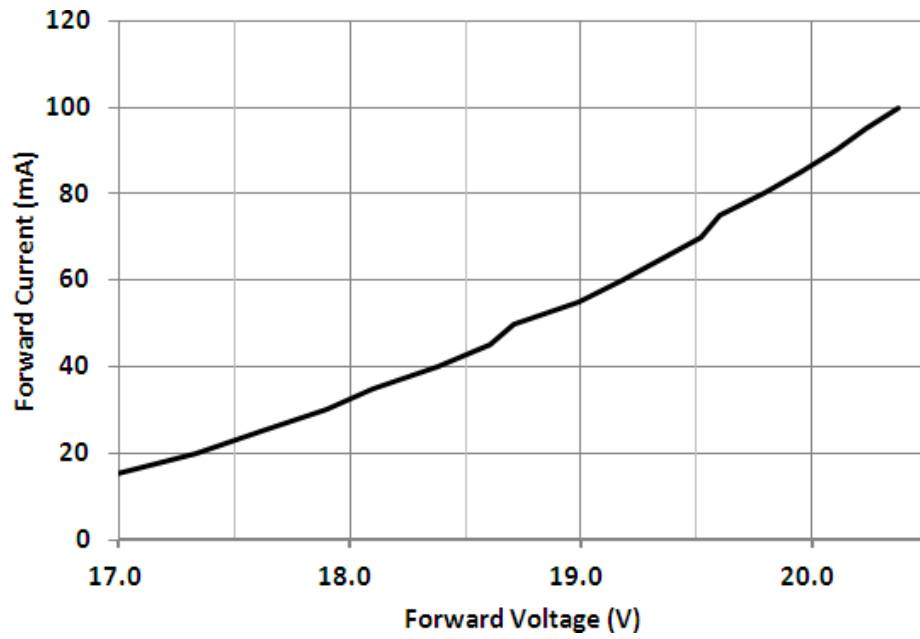


■ Forward Current vs. Relative Luminosity

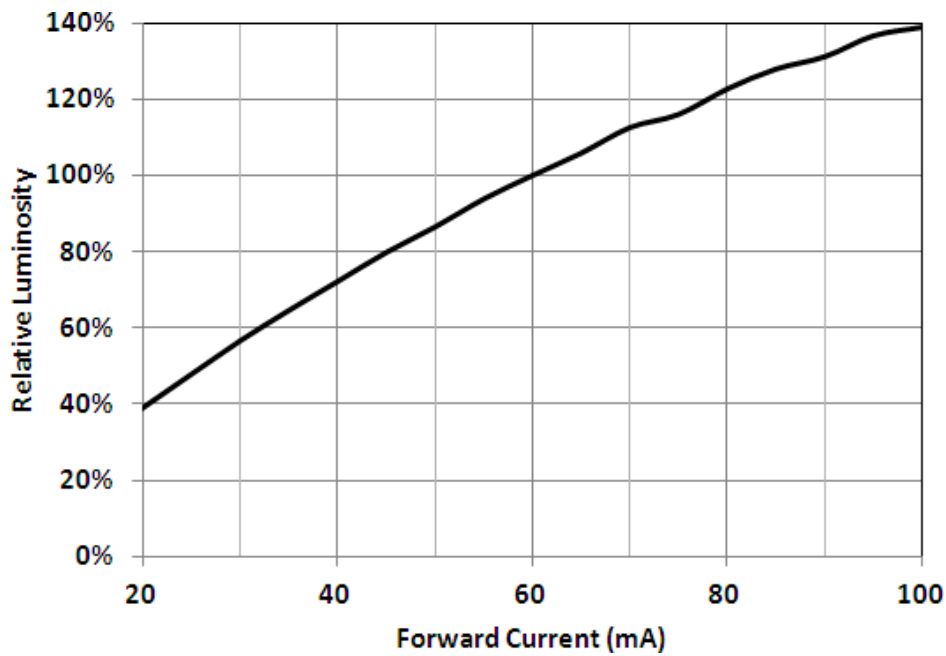



■ Forward Current vs. Chromaticity Coordinate

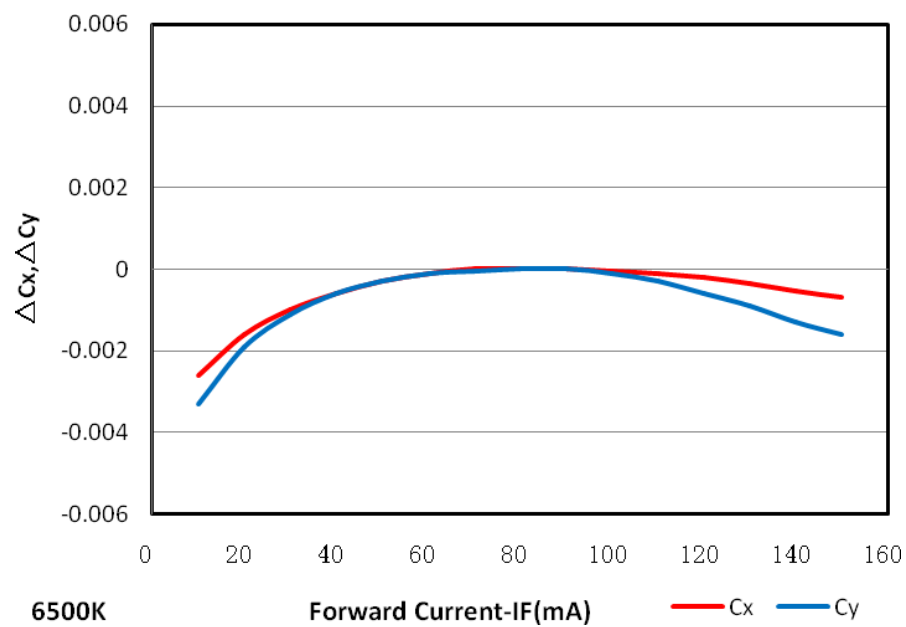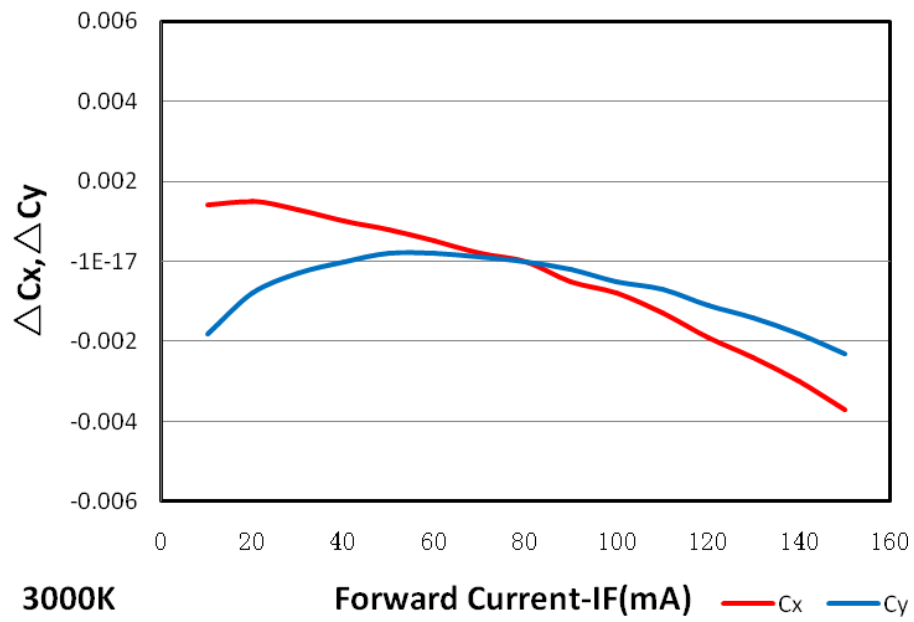


■ Relative Luminous Intensity vs. Ambient Temperature

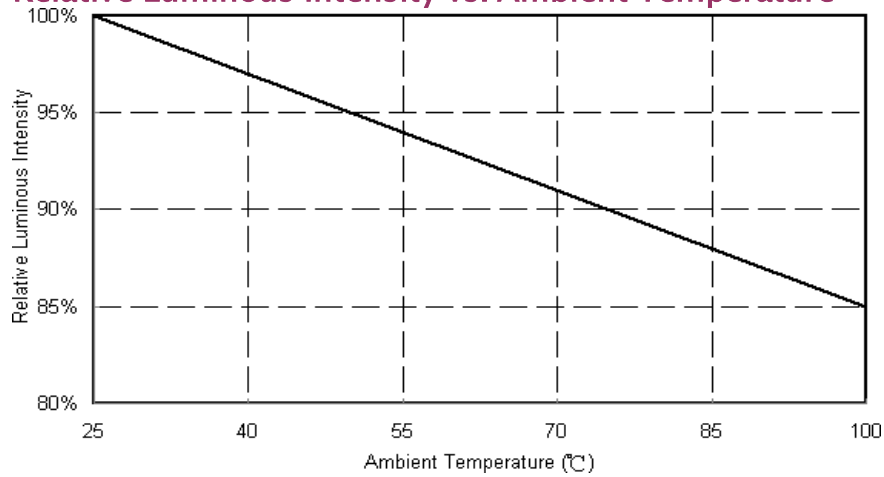

■ Chromaticity vs. Ambient Temperature

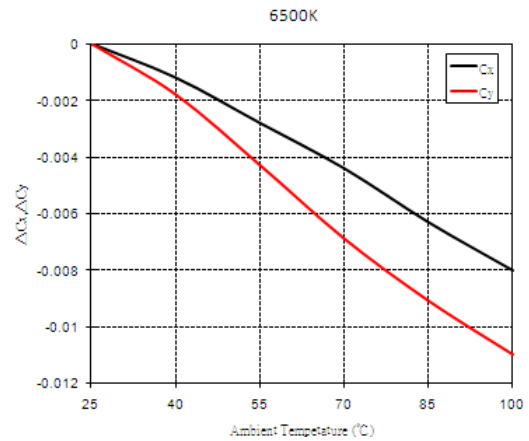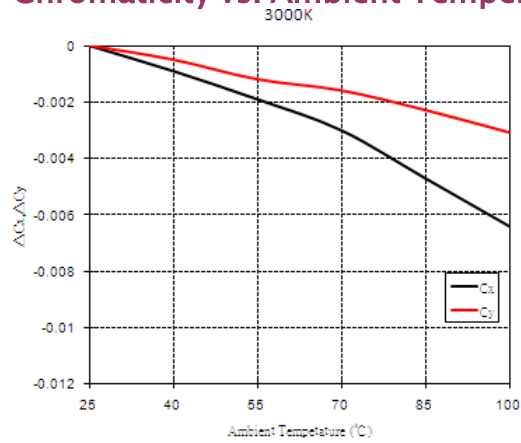

■ Relative VF vs. Ambient Temperature

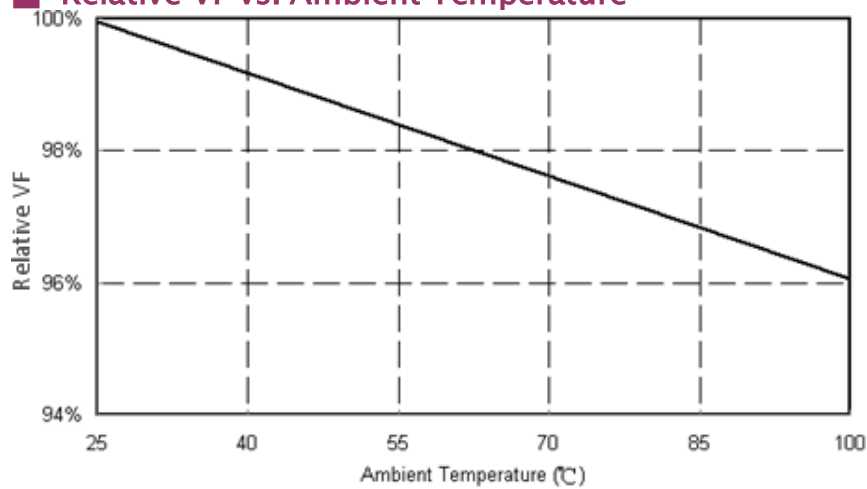

Reliability

PC35H38 V0

Product Specification

Reliability test

Item	Condition	Time/Cycle
Steady State Operating Life of Low Temperature -40℃	-40℃ Operating	1 000 Hrs
Steady State Operating Life of High Temperature 60℃	60℃ Operating	1 000 Hrs
Steady State Operating Life of High Temperature Ts105℃	Ts 105 ℃ Operating	1 000 Hrs
Low temperature storage -40℃	-40℃ Storage	1 000 Hrs
High temperature storage 100℃	100℃ Storage	1 000 Hrs
Steady State Operating Life of High Humidity Heat 60℃90%	60℃/90% Operating	1 000 Hrs
Resistance to soldering heat on PCB (JEDEC MSL3)	pre-store@60℃, 60%RH for 52hrs Tsl d max.=260℃ 10sec	1 cycle 3 Times
Thermal shock	-40℃/20minr ~5minr ~ 100℃/20min	100 Cycles

Judgment Criteria

Item	Symbol	Test Condition	Judgment Criteria
Forward Voltage	Vf	50mA	$\Delta Vf < 10 \%$
Luminous Flux	Iv	50mA	$\Delta Iv < 30 \%$

Packing


PC35H38 V0


Product Specification

Label




Carrier Taping

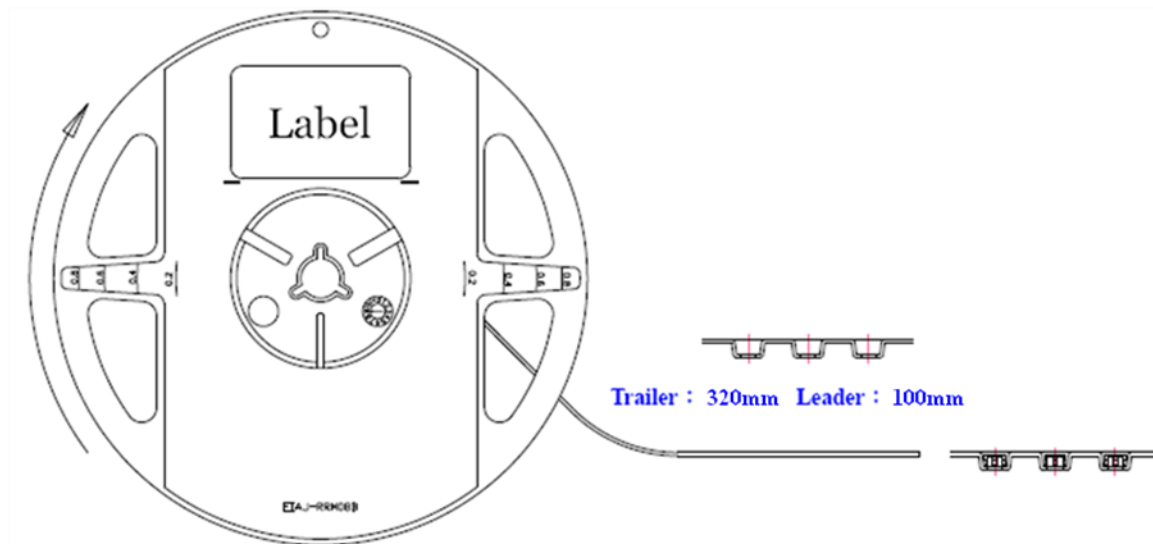

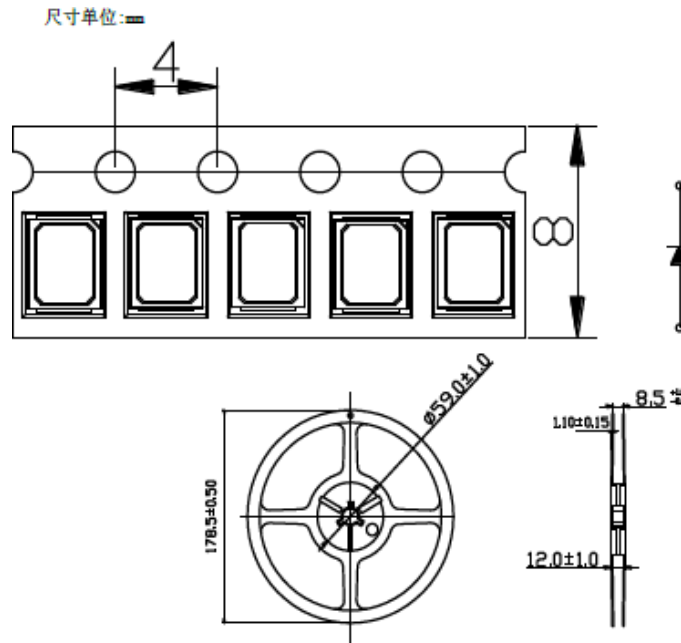


Shield Bag Taping

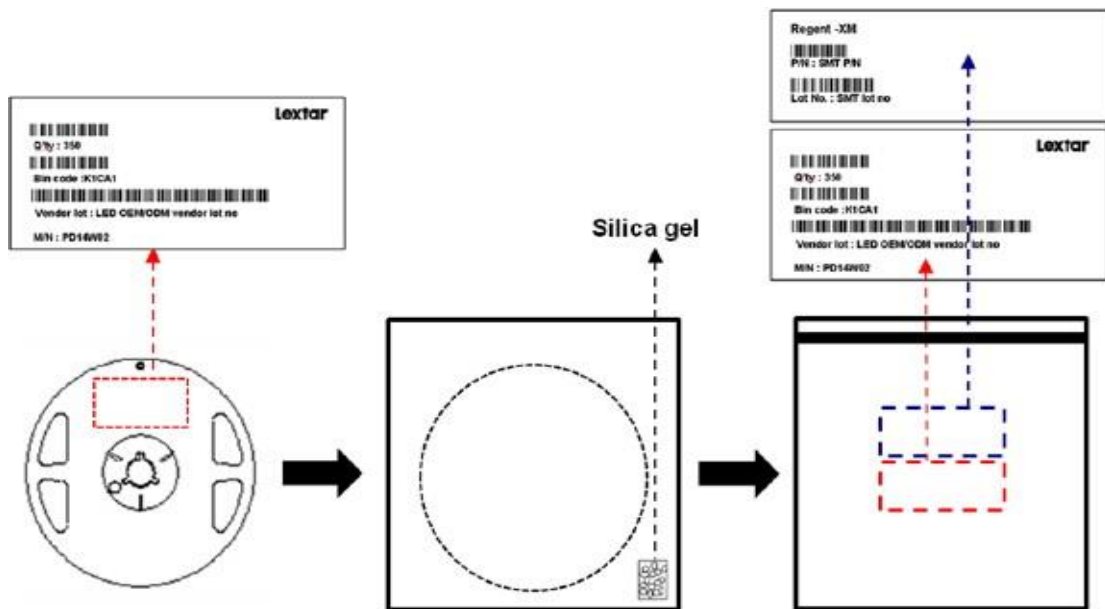


Packing Box

Type	Large Box		Medium Box		Small Box	
Dimension	541X511X276mm		385X303X260mm		283X235x70mm	
Maximum Reels	7"X12mm Reel	64/R	7"X12mm Reel	21/R	7"X12mm Reel	4/R
Minimum Reels	7"X12mm Reel	32/R	7"X12mm Reel	9/R	7"X12mm Reel	1/R


Small Box

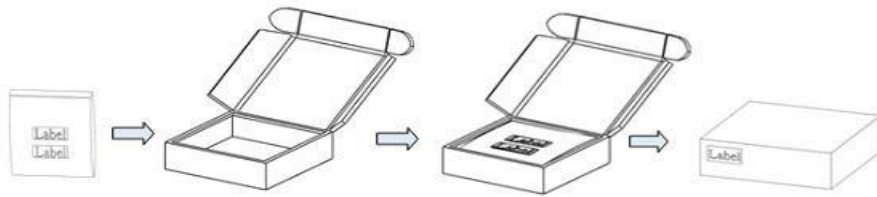

Medium Box

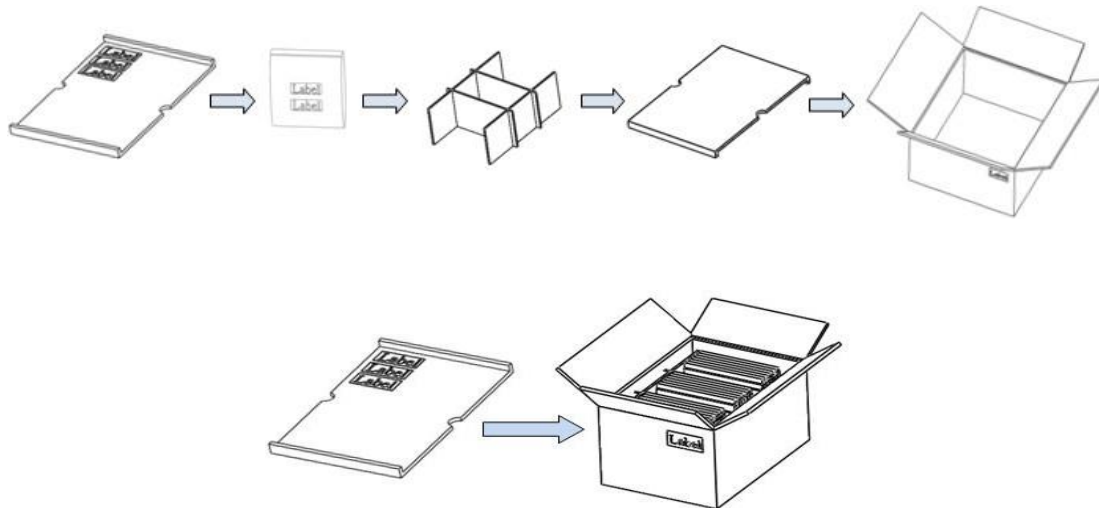

Large Box

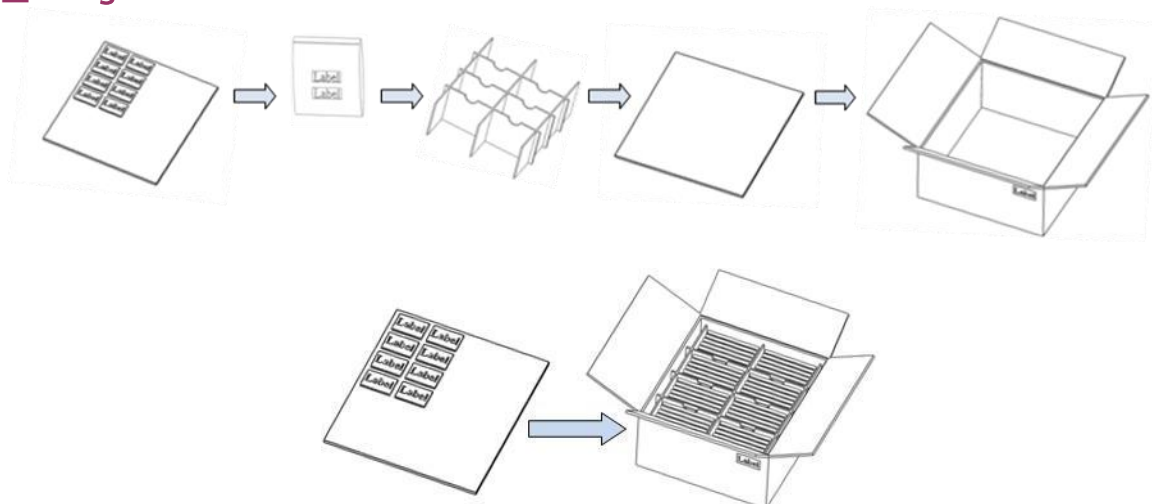

Precautions

PC35H38 V0
Product Specification

■ Safety Precautions


- The LED light output is too strong for human eyes without shield. Prevent eye contact directly more than seconds.
- Ensure operating under maximum rating.

■ Storage

- Before opening the package, the LEDs should storage under 30°C, 60% RH.
- After opening the package bag, the LEDs should be keep under 30°C, 60% RH. Recommend to use within 168hrs. If unused LEDs remain, suggest to store into moisture proof bag or original package bag with moisture absorbent material such as silica gel. Reseal well is necessary.
- If the product exceeded the storage period or the moisture absorbent material faded away, baking treatment should be done by following conditions. Bake condition: 60°C, 12hours (One time only).

■ Soldering Notice and Conditions

- When soldering LEDs,
- Do not solder/reflow the same LED over two times.
- Recommend soldering conditions:
Hand soldering: 350 °C max, 3 sec. max.
Reflow soldering: Pre-heat 180 °C max, 180 sec. max.
Peak 260 °C max, 5 sec. max.
- Reflow temperature profile as below: (lead-free solder)

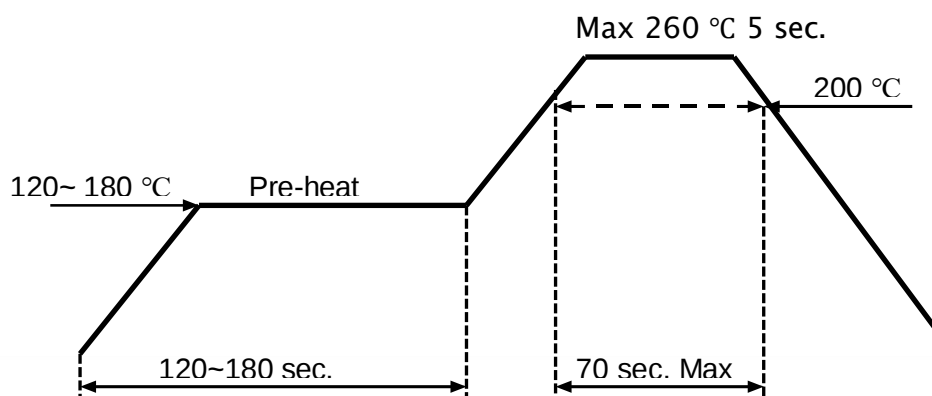

- When soldering, don't put stress on the LEDs
- After LEDs have been soldered, strongly recommend not to repair to keep the LEDs performance.

■ Static Electricity

- LED package is extremely sensitive to static electricity. It's recommended that anti-electrostatic glove and wrist band is necessary when handling the LEDs. All devices are also be grounded properly as well.
- Protection devices design should be considered in the LED driving circuit.

■ Cleaning

- If washing is required, recommend to use alcohol as a solvent.
- Recommend to avoid cleaning the LEDs by ultrasonic. If necessary, pre-test the LED is necessary to confirm whether any damage occur after the process.

Revision History

PC35H38 V0
Product Specification

Date	Contents	Writer	Approved
2021.07.10	New version	Ching Chen	Berris Huang